


serie AT

Derivadores inductivos blindados Inductive Blinded Derivators Dérivateurs inductifs blindés

5-2400 MHz
5-2400 MHz
5-2400 MHz

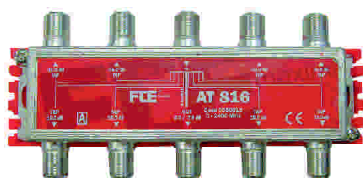

AT 816

Código
Code
Code 0980816

Banda cubierta (MHz)
Covered Band (MHz) 5-2400
Bande de fréquence (MHz)

Banda de retorno (MHz)
Return path Band (MHz) 5-30 / 5-65
Bande de retour (MHz)

Nº de salidas derivación
Nr. of TAPS 8
Nb de sorties derivation

	Freq. (MHz)	TYP	MAX
Atenuación de derivación (dB)	5-470	16,0	17,0
Tap attenuation (dB)	470-862	16,5	17,0
Atténuation de derivation (dB)	950-2400	16,5	17,5

Atenuación de paso (dB)	5-470	5,0	6,0
Pass attenuation (dB)	470-862	5,2	6,0
Atténuation de passage (dB)	950-2400	6,5	7,5

Desacoplo entre salidas (dB)	5-470	>40
Decoupl. between outputs (dB)	470-862	>30
Désaccoup. entre sorties(dB)	950-2150	>28

Pérdidas de retorno (dB)	IN	>20
Return loss (dB)	OUT	>20
Pertes de retour (dB)	TAP	>18

Factor de apantallamiento (dB)		> 100
Screening factor (dB)		> 100
Facteur d'accouplement (dB)		

Impedancia (W)		75
Impedance (W)		75
Impédance (W)		

Paso de corriente		IN - OUT
Current pass		IN - OUT
Passage de courant		


Conectores	F hembra
Connectors	F female
Connecteurs	F femelle

Soporte plástico montaje	Incluido
Plastic suport	Included
Support plastique pour le montage	Inclu

Dimensiones (mm)	
Dimensions (mm)	5 pcs: 165 x 125 x 70
Dimensions (mm)	60 pcs: 330 x 250 x 210

Peso embalaje (Kg)	
Packing weight (Kg)	5 pcs: 0.9
Poids du l'emballage (Kg)	60 pcs: 11

Cantidad por embalaje	
Packing quantity	5 / 60
Quantité par emballage	



AT 820

Código
Code
Code 0980820

Banda cubierta (MHz)
Covered Band (MHz) 5-2400
Bande de fréquence (MHz)

Banda de retorno (MHz)
Return path Band (MHz) 5-30 / 5-65
Bande de retour (MHz)

Nº de salidas derivación
Nr. of TAPS 8
Nb de sorties derivation

	Freq. (MHz)	TYP	MAX
Atenuación de derivación (dB)	5-470	20,0	21,0
Tap attenuation (dB)	470-862	20,5	21,0
Atténuation de derivation (dB)	950-2400	20,5	21,5

Atenuación de paso (dB)	5-470	4,7	5,5
Pass attenuation (dB)	470-862	5,0	5,5
Atténuation de passage (dB)	950-2400	5,5	6,3

Desacoplo entre salidas (dB)	5-470	>40
Decoupl. between outputs (dB)	470-862	>30
Désaccoup. entre sorties(dB)	950-2150	>28

Pérdidas de retorno (dB)	IN	>20
Return loss (dB)	OUT	>20
Pertes de retour (dB)	TAP	>18

Factor de apantallamiento (dB)		> 100
Screening factor (dB)		> 100
Facteur d'accouplement (dB)		

Impedancia (W)		75
Impedance (W)		75
Impédance (W)		

Paso de corriente		IN - OUT
Current pass		IN - OUT
Passage de courant		


Conectores	F hembra
Connectors	F female
Connecteurs	F femelle

Soporte plástico montaje	Incluido
Plastic suport	Included
Support plastique pour le montage	Inclu

Dimensiones (mm)	
Dimensions (mm)	5 pcs: 165 x 125 x 70
Dimensions (mm)	60 pcs: 330 x 250 x 210

Peso embalaje (Kg)	
Packing weight (Kg)	5 pcs: 0.9
Poids du l'emballage (Kg)	60 pcs: 11

Cantidad por embalaje	
Packing quantity	5 / 60
Quantité par emballage	

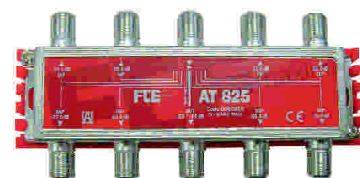

AT 825

Código
Code
Code 0980825

Banda cubierta (MHz)
Covered Band (MHz) 5-2400
Bande de fréquence (MHz)

Banda de retorno (MHz)
Return path Band (MHz) 5-30 / 5-65
Bande de retour (MHz)

Nº de salidas derivación
Nr. of TAPS 8
Nb de sorties derivation

	Freq. (MHz)	TYP	MAX
Atenuación de derivación (dB)	5-470	25,0	31,0
Tap attenuation (dB)	470-862	25,5	31,0
Atténuation de derivation (dB)	950-2400	26,5	32,5

Atenuación de paso (dB)	5-470	3,2	3,7
Pass attenuation (dB)	470-862	3,3	3,8
Atténuation de passage (dB)	950-2400	4,0	5,0

Desacoplo entre salidas (dB)	5-470	>40
Decoupl. between outputs (dB)	470-862	>30
Désaccoup. entre sorties(dB)	950-2150	>28

Pérdidas de retorno (dB)	IN	>20
Return loss (dB)	OUT	>20
Pertes de retour (dB)	TAP	>18

Factor de apantallamiento (dB)		> 100
Screening factor (dB)		> 100
Facteur d'accouplement (dB)		

Impedancia (W)		75
Impedance (W)		75
Impédance (W)		

Paso de corriente		IN - OUT
Current pass		IN - OUT
Passage de courant		

Conectores	F hembra
Connectors	F female
Connecteurs	F femelle

Soporte plástico montaje	Incluido
Plastic suport	Included
Support plastique pour le montage	Inclu

Dimensiones (mm)	
Dimensions (mm)	5 pcs: 165 x 125 x 70
Dimensions (mm)	60 pcs: 330 x 250 x 210

Peso embalaje (Kg)	
Packing weight (Kg)	5 pcs: 0.9
Poids du l'emballage (Kg)	60 pcs: 11

Cantidad por embalaje	
Packing quantity	5 / 60
Quantité par emballage	

